



High Power Motor Test Systems and Equipment



Perform load and no-load testing of all types of

- AC and DC motors
- Traction motors
- Synchronous motors
- Induction motors
- Shunt-, Compound-, and Series- Wound motors



Test up to 50,000 HP motors!



Specifications are subject to change without notice.

Brochure No. 50104

RECOGNIZED WORLDWIDE FOR EXCEPTIONAL SERVICE

Phenix Technologies Electric Motor Test Systems are in operation around the world, providing exceptional service to **Motor Manufacturers, Motor Service Shops, Industrial Plants, Electric Utilities, Government Installations.**

For over 35 years Phenix Technologies has established worldwide recognition as the leading manufacturer of Motor Test Systems. We have supplied more Motor Test Systems than all other manufacturers combined. Not only does our engineering expertise and manufacturing capabilities provide solutions for customers who may need a custom designed test system for special requirements, Phenix Technologies continues to introduce new innovations and technology that leaves our competition behind. The Phenix Technologies' team manufactured and delivered the world's largest Motor Test System and Core Loss Tester.

Phenix Technologies offers a complete line of **electric motor test systems for load and no-load testing of all types of AC and DC motors, traction motors, synchronous motors, induction motors, shunt-wound, compound-wound, and series-wound motors.** We have test systems available for testing fractional up to 50,000 HP motors.

When your electric motor testing needs require complete system design and installation, from concept to commissioning, Phenix Technologies is ready to be your project partner.

QUALITY CONSTRUCTION ENSURES RELIABILITY

Each motor test system is equipped with all of the controls, power supplies, metering, and safety/protection devices necessary for efficient testing. Our heavy-duty steel cabinet has removable panels, lifting eyes, slots for fork lifting, and meets NEMA 1 standard for indoor installation. Control panels are primed and painted with a high quality polyurethane gloss finish and have permanently imprinted indicator labels. Our ISO9001 certification ensures optimum standards of quality are met from design through production and verified in final pre-shipment testing procedures.

RANGE OF OPTIONS

- AC, DC, or AC/DC test systems
- Medium or low voltage input options
- Output power up to 10,000 kVA
- Configurations that allow testing of a 10,000 horsepower motor at full load and 50,000 horsepower at no load
- Manual operation, advanced control systems, fully automated testing, custom software solutions, database and report generation
- Precision voltage regulation with the Phenix Column Type Variable Transformer
- "R2" design allows full voltage regulation without interruption which means the motor does not slow down for tap changes
- Highly accurate Voltage, Current, Power, Watts (including Kilowatt-Hours), Vibration, Temperature, and Speed measurement
- Commissioning and training to provide your operator with the information and resources they need for efficient and safe use of your investment

The following information will assist you in choosing the power supplies, features, and options for a motor test system that meets your specific needs. For additional assistance, please consult one of Phenix Technologies Sales Representatives.

Cover photos courtesy of Integrated Power Services and Baldor Electric Company.



**MTS R2 Series
Model MTS3750R2-1500**

**Model MTS1500R
with Swivel Boom**





VOLTAGE REGULATION SYSTEMS

The Phenix Column Type Variable Transformer – Leveraging Your Investment in Test Equipment...

Whether you are an OEM or are in the electric motor repair business, the key to keeping your business running smoothly is reliable equipment. No matter whether you have to test a 50 HP or a 50,000 HP machine, Phenix Technologies Motor Test Systems are synonymous with reliability. The heart of any high power test panel is the voltage regulating system. Phenix Technologies Column Type Variable Transformers (CTVT) have a proven record of performance of over 35 years of service in hundreds of high power motor test field installations. With no sliding contacts to wear or bind, and no sensitive power electronics that can fail leading to expensive winding damage, the Phenix CTVT has become the workhorse of the large motor testing industry.

Standard MTS-R Series – Unmatched Reliability and Performance...

Phenix's standard high power Motor Test Set product line utilizes the CTVT for full range voltage regulation on all output voltage taps. With a turn-to-turn voltage resolution of approximately 0.15%, all Phenix high power Motor Test Sets demonstrate an impressive ability to target and maintain the correct test voltage at the output terminals. Our standard line of high power Motor Test Systems can be designed to operate at 50 or 60 Hz, from any low voltage service up to 600 VAC, at power levels up to 2,500 kVA. The Standard MTS-R Series is capable of performing full load tests on motors rated up to 2,500 HP, and no load tests on motors rated up to 12,500 HP.



MTS-R2 Series – When “Serious” Power is Required...

With over 10 years of service history behind them, the Phenix MTS-R2 series of very high power Motor Test Sets delivers the power to test even the largest electric motors. With the Phenix CTVT applied as the basic voltage regulating element, combined with a multi-tap step-up transformer and a computer controlled on-load switching network, these units are capable of providing uninterrupted voltage from 0 up to 14.4 kVAC. When starting motors in excess of 10,000 HP, maintaining an uninterrupted, regulated voltage during startup is essential to avoiding high inrush currents that could lead to tripping of current limiting devices within the distribution network.

Our MTS-R2 series can be designed to operate at 50 or 60 Hz, from any medium voltage service up to 14.4 kVAC, at power levels up to 10,000 kVA. The MTS-R2 Series is capable of performing full load tests on motors rated up to 10,000 HP, and no load tests on motors rated up to 50,000 HP.

Precise, Balanced Voltage Control – A Must When Making Efficiency Measurements...

Proper efficiency measurements require a balanced set of low distortion, three-phase voltages. Independent, automated phase voltage balancing is available as an option on all Phenix standard MTS-R models, and comes installed as standard equipment on all MTS-R2 series units. With the independent phase balance option installed, you won't have to make any explanations to your customers to get them to accept the test results for motors tested with unbalanced phase voltages, or waste your time arguing with your electric service provider about your service quality. With ever increasing world energy costs, and a global obligation for all of us to become more wise stewards of the environment, your business can use the power of a Phenix Motor Test System to convince your customers that you are serious when it comes to proving the quality and efficiency of your products and services.

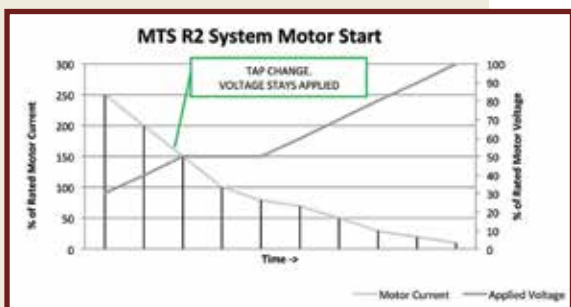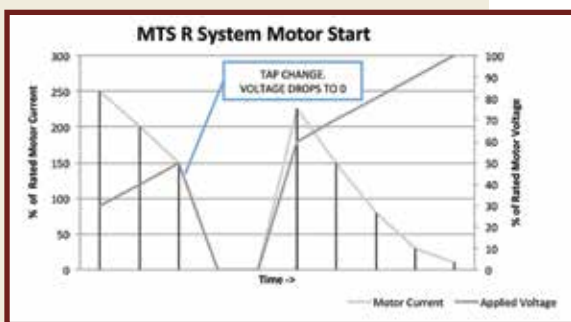

MOTOR TEST SYSTEM SIZING

The following testing capabilities are approximate and depend on type and style of the motor to be tested.

Phenix Technologies Motor Test Systems will typically run 1 HP per kVA of power fully loaded and 5 HP per kVA no-load. For example, a 1000 kVA motor test system is capable of approximate full load testing of a 1000 HP motor and no-load testing of a 5000 HP motor.

Model	Input Current*	Max AC Testing Capability		Max DC Testing Capability (Optional)		Max AC Line to Line Tap Voltage (V)	Max Tap Current (A)
		Load (HP)	No Load (HP)	Load (HP)	No Load (HP)		
MTS300R	375	300	1500	240	1200	14,400	400
MTS500R	625	500	2500	480	1920	14,400	800
MTS750R	925	750	3750	720	2880	14,400	1200
MTS1000R	1250	1000	5000	960	3840	14,400	1200
MTS1250R	1575	1250	6250	1200	4800	14,400	1200
MTS1500R	1875	1500	7500	1350	5400	14,400	1200
MTS2000R	2400	2000	10,000	1750	7000	14,400	1200
MTS2500R	3150	2500	12,500	1750	7000	14,400	1200

NOTE:

Input: 600 V maximum

Standard Taps: 240 V, 480 V, 600 V, 1200 V, 2300 V, 3300 V, 4160 V

The 3-phase AC supply is rated for continuous duty and has a 1-minute rated at 250% to allow for high inrush currents during motor start-up.

*Currents listed assumes 480 V, 3-phase supply. A separate 115/220 V, 1-phase supply is also required for control power.

MTS-R2 DESIGN – VERY HIGH POWER MOTOR TEST SYSTEMS

Model	Max AC Testing Capability		Max DC Testing Capability (Optional)		Standard Max AC Line to Line Tap Voltage (V)	Max Tap Current (A)
	Load (HP)	No Load (HP)	Load (HP)	No Load (HP)		
MTS2000R2	2000	10,000	1200	4800	14,400	1200
MTS3000R2	3000	15,000	1200	4800	14,400	1200
MTS3750R2	3750	18,750	1400	5600	14,400	1200
MTS5000R2	5000	25,000	1400	5600	14,400	1200
MTS6500R2	6500	32,500	1750	7000	14,400	1200
MTS7500R2	7500	33,000	1750	7000	14,400	1200
MTS10000R2	10,000	40,000	1750	7000	14,400	1200

NOTE:

Input: Up to 15 kV L-L

Output: Up to 14.4 kV L-L maximum

AC Motor Load Testing is 1 kVA per 1 Load HP and AC Motor No-Load Testing is 1 kVA per 5 Load HP.



CONTROL and METERING Options

A selection of control and metering packages are available which greatly enhances the function, safety, and automation of each PHENIX motor test system.

All High Power Motor Test Systems are equipped with Microprocessor Controls and a Human Machine Interface (HMI) that processes and displays control functions and meter readings.

User-friendly, PHENIX WINMTS software is provided for complete database storage of customer and motor information as well as test result storage, display, and printout.

Future periodic calibration of the metering is easily accomplished by one of our PHENIX service technicians keeping your motor test system at top performance level for many years.

Standard Operating Control functions include:

- Main Power Breaker with indicator lamp
- Control Power Breaker and indicator lamp
- High Voltage ON and OFF pushbuttons/indicators
- Emergency OFF Mushroom pushbutton
- Security Circuit Interlock Open indicator lamp
- Ground Fault Reset pushbutton/indicator
- Raise and Lower Voltage pushbuttons/indicators
- Ramp Speed control
- Output Current Selector pushbuttons/indicators
- Tap Select Increase/Decrease pushbuttons
- HV Interlock Key-Switch
- Regulator Overload Protection
- Thermostatically controlled Cooling Fans/Cooling Fan Breaker with Indicator

When optional features or supplies are purchased, additional control features exist.



TESTING SOFTWARE

Combining the control system with our testing software creates a very user friendly system which provides complete documentation and reporting for each motor tested. Two data bases are created, one of all of your clients and a second of all motors.

*Software is compatible with ACS motor shop software.

The Main Screen of WinMTS provides direct access to your customer and motor records.

Customer Edit

Name: Phenix Technologies
 ID: PPHX
 Address: 75 Speicher Drive
 City: Accident State: MD Zip Code: 21520
 Contact: John Doe
 Phone: 301-746-8118

OK Cancel

Duration Test

Time	A-B (V)	B-C (V)	C-A (V)	A (A)	B (A)	C (A)	Field (V)	Field (A)	Kwatts	RPM	Temp 1	Temp 2	Temp 3	Test
00:00:45	548.2	547.5	546.8	13.5	14.8	13.2			1.71	0	100.1			
00:01:00	548.1	550.2	547.2	13.4	13.9	13.5			1.80	0	100.2			
00:01:15	548.8	551.7	549.9	13.4	13.9	13.7			1.72	0	100.1			
00:01:30	546.4	545.9	548.6	13.4	13.6	13.8			1.70	0	100.1			
00:01:45	544.9	548.3	548.3	13.5	13.4	13.8			1.69	0	100.2			
00:02:00	547.5	548.4	550.9	13.8	13.4	13.7			1.71	0	100.1			
00:02:15	548.0	546.3	549.5	14.0	13.4	13.4			1.79	0	100.2			
00:02:30	548.4	546.8	549.1	13.9	13.5	13.4			1.74	0	100.1			
00:03:00	550.0	548.3	550.0	13.9	13.6	13.4			1.73	0	100.2			
00:03:15	552.3	558.6	550.2	13.8	13.9	13.3			1.71	0	100.2			
00:03:45	558.6	550.1	548.1	13.6	14.8	13.3			1.71	0	100.1			
00:04:00	558.0	551.8	548.8	13.6	13.9	13.5			1.70	0	100.2			

Duration: 00:04:13

Read Meters Done Notes Abort

Motor Data

Motor Type: AC 3-Phase Induction
 Serial No: YJ92345 ID:
 Manufacturer: Joy Manufacturing
 Enclosure: Org Poles:
 Model: Frame: 10C804J
 Winding: Insulation: Joy H
 Field V: Field A
 Voltage: 550 Current: 51
 RPM: 1150 HP: 50
 Power Factor: Efficiency:

OK Cancel

WinMTS

Job Number / Report Number: JPH_1
 Customer: Phenix Technologies
 Temperature / Vibration Levels
 Test Type: Load Test, Duration Test
 Results Options

Motor Load Test

Direction: 25 Hz, 50 Hz, 75 Hz, 100 Hz, 125 Hz, 150 Hz
 Voltage Meters (V): A-B: 548.3 B-C: 558.3 C-A: 548.3
 Current Meters (A): A: 13.6 B: 13.8 C: 13.5
 Wattohrs (Kw): 1.70
 Tachometer (RPM): 0
 Calculations: Power Factor: 0.131 Efficiency: N/A
 Temperature Meters: 1: 100.2

Read Meters Read Vibration Done Notes Abort

Phenix Technologies
 75 Speicher Drive
 Accident, MD, 21520
 301-746-8118

Customer: Phenix Technologies Contact: Kevin Margroff
 75 Speicher Drive Phone: 301-746-8118
 Accident, MD, 21520 Date: 02/20/06 2:33:00 PM

Job Number: Sep25-01 Voltage: 490
 Serial No: 395-0234-71 Current: 118
 Manufacturer: Toshiba Horsepower: 35
 Model No: Vertical Pump RPM: 1000
 Type: 1-Phase Synchronous Power Factor: 0.987
 Frame: T type(B) Efficiency: 0.756
 Enclosure: Shell Field V:
 Poles: A, B, C Field A:

	0 %	25 %	50 %	75 %	100 %	125 %	150 %
A-B VOLTS	490	492	491	490	490		
B-C VOLTS	459	490	490	490	490		
C-A VOLTS	451	491	491	491	490		
A AMPS	67.9	99.3	119.3	137.1	137.1		
B AMPS	65.7	99.8	118.9	136.2	136.2		
C AMPS	66.3	99.9	126.2	137.8	137.8		
Kwatts	10.2	34.7	57.3	84.5	84.5		
RPM	1000	1708	1708	1775	1775		
H.P.	0	44.8	74.7	110.4	110.4		
TORQUE	0	201	312	360	360		
EFFICIENCY	0.189	0.426	0.628	0.725	0.725		
P.F.	N/A	0.983	0.973	0.975	0.975		

Notes: This is a sample load test report.
 Tested By: _____ Date: _____

Page 1



PRECISE INSTRUMENTATION

The test system has a complete instrumentation package for definitive measurement of electrical and physical characteristics of motors under test. All meters for AC and DC supplies are digital and displayed on the Human Machine Interface. High accuracy current transformers (CT), potential transformers (PT) and transducers are utilized for stability and a high degree of meter accuracy. All meters are calibrated with standards traceable to NIST/NRC and a calibration sticker is affixed to the control panel faceplate.

The meter readings displayed are determined by the model of the test set and options selected.

The following meters have a 5-digit display and Accuracy is $\pm 0.5\%$ of range \pm Least Significant Digit (LSD)

Standard meters included for AC supplies

- Three-Phase AC Output Voltmeters displaying phases A-B, B-C, C-A
- Three-Phase AC Output Currentmeters displaying phases A, B, C

Optional meters

- DC Armature Output Voltmeter
- DC Armature Output Currentmeter
- DC Field Output Voltmeter
- DC Field Output Currentmeter
- DC Series Field Output Voltmeter
- DC Series Field Output Currentmeter
- Three-Phase Wattmeter

Optional physical measurement metering

- Vibration Monitor, Range: 0-10.00 mil (displacement)/0-0.3 in/sec (velocity), Accuracy $\pm 1\%$ of Range +LSD
- Temperature Meter, Range: 0-200.0°C (32.0- 392.0°F), Accuracy: $\pm 1^\circ$
- Tachometer, Range: 0-9,999 RPM, Accuracy ± 1 RPM



AC Test



DC Test

OPTIONS AVAILABLE

- Additional Output Taps
- AC Output Phase Balance Compensation for motor test systems with column-type transformers only
- AC Phase Reversal Switch
- DC Armature and Shunt Field Power Supplies
- DC Series Field Power Supply
- DC Armature Reversal Switch
- Synchronous Motor Shorting Switch
- Wattmeter
- Off-Zero Bypass
- Multi-function Input Meter displays voltage, current, power factor, kVA, kW
- Physical Measurement Instrumentation:
 - Vibration Measurement
 - Thermocouple Temperature Measurement
 - RTD Temperature Measurement
 - Tachometer/Optical Speed Measurement
- Computer and Printer
- Remote Control Console with Writing Desk and Interconnect Cables
- Remote Output Cubicle to locate output connection near test area
- Swivel Jib Boom for Output Leads
- Longer Interconnect Cables
- Dynamometer Interface / Control Mounting

CABLES

Input: N/A (input connection is at main circuit breaker)

Output: 15' (5 m) output cables for all supplies with twist-lock connectors on one end and ring terminals with rubber boots on opposite end

Optional Remote Console: 15' (5 m) interconnect cables

Optional Temperature Thermocouple: 15' (5 m)

Optional Speed Measurement: 15' (5 m)



Other motor testing products PHENIX offers:

- Low Power Motor Test Systems
- Core Loss Testers
- AC Hipots
- DC Hipots
- Water-Brake Dynamometers
- Insulation Analyzers
- Megohmmeters
- Microhmmeters



PHENIX Technologies is committed to providing leadership, innovation, technology, quality, and service in all areas of our business.

Our 80,000 square-foot headquarters is a modern manufacturing facility. All aspects of electrical, mechanical, and software design and production are performed in this facility and controlled by an ISO9001 certified quality program. Our engineers offer a unique blend of theoretical knowledge and practical experience. Our Service and Calibration Department assists customers during and after installation to ensure years of trouble free service.

We carry our commitment into the future as we proudly continue to provide the best in high voltage, high current, high power test systems and components.

High Voltage • High Current • High Power Test Systems and Components

**ISO 9001
CERTIFIED**



www.phenixtech.com

World Headquarters

Phenix Technologies, Inc.

75 Speicher Drive
Accident, MD 21520 USA

Ph: +1.301.746.8118

Fx: +1.301.895.5570

Info@phenixtech.com

Branch Offices

Phenix Systems AG

Riehenstrasse 62A, 4058 Basel, Switzerland

Ph: +41.61.383.2770 • Fx: +41.61.383.2771

Info@phenixsystems.com

Phenix Asia

Zhong Cheng Rd, Sec 1, No 177, 2F, Taipei 11148 Taiwan

Ph: +886.2.2835.9738 • Fx: +886.2.2835.9879

Info@phenixasia.com

